


MIT-SE Plus Vinylester mortar, styrene free




Features

- European Technical Approval Option 1 for cracked and non-cracked concrete with anchor rod and with rebar used as anchor
- European Technical Approval according to ETAG 029 for use in masonry
- European Technical Approval for post-installed rebar connections
- German National Approval for post-installed rebar connections
- ICC-ES Report ESR-3410
- Fire resistance test certification F30-F120
- Fire resistance test certification F180 (Rebar)
- VOC free according to Swiss legislation and certified A+ according to DEVL 1101903D / DEVL 1104875A
- LEED - Test Report
- Certification for drinking water systems
- The anchor may also be used under seismic influence for performance category C1
- Universal mortar for highest loads in almost all building materials
- Application also in damp and water-filled drill holes
- Variable setting depth
- Suitable for overhead fixings
- Simple and speedy working
- Styrene free and low odour
- Colour of mortar: grey
- Indoor (zinc plated) and outdoor (stainless steel) applications

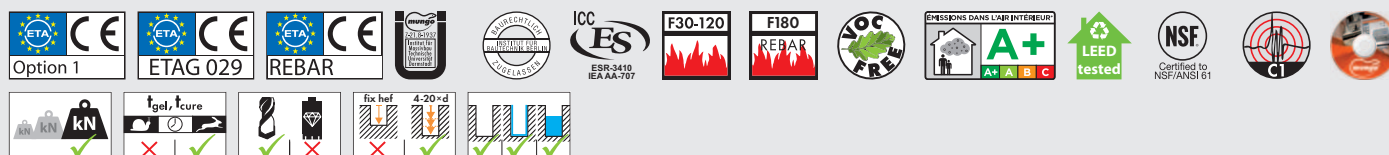

Applications


post-installed rebar connections, steel constructions, wooden constructions, façades, façade scaffolds, railings, high-racks, machines, staircases, ladders, cable trays, canopies, hand-rails, consoles



Temperatures

	≥ -10°C	≥ -5°C	≥ 0°C	≥ +5°C	≥ +10°C	≥ +20°C	≥ +30°C	≥ +35°C	≥ +40°C
Working time, in minutes (t _{gel})	90	90	45	25	15	6	4	2	1.5
Curing time, dry in minutes (t _{cure})	24 h	14 h	7 h	2 h	90	45	25	20	15
Curing time, wet in minutes (t _{cure})	48 h	28 h	14 h	4 h	3 h	90	50	40	30

Installation



Article code	Description	Languages	Content	Box content	Quantity per pallet
1710024	Cartridge incl. 2 mixers	DE/GB	165	12	1260

Not part of the rebar approval
Application with silicone gun

MIT-SE Plus Vinylester mortar, styrene free, 165 ml cartridge



Article code	Description	Languages	Content	Box content	Quantity per pallet
1710015	Cartridge incl. 2 mixers	DE/GB/FR/IT/PL	280	12	1152

Application with silicone gun

MIT-SE Plus Vinylester mortar, styrene free, 280 ml cartridge, self opening

