


# MIT-SP Polyester mortar, styrene free




## Features

- European Technical Approval Option 7 for non-cracked concrete with anchor rod and with rebar used as anchor
- European Technical Approval according to ETAG 029 for use in masonry
- VOC free according to Swiss legislation and certified A+ according to DEVL 1101903D / DEVL 1104875A
- LEED - Test Report
- Suitable for assemblies in perforated brick with sleeve
- Low odour
- Colour of mortar: grey
- Indoor (zinc plated) and outdoor (stainless steel) applications

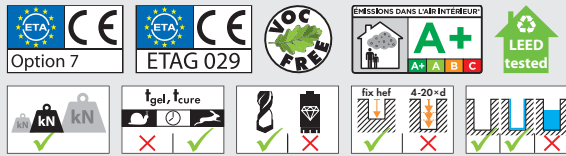

## Applications


light steel constructions, frames, gates, light duty applications

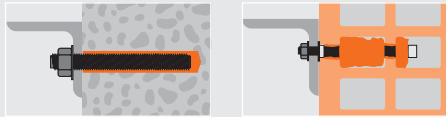

## Temperatures

	-5+0°C	0+5°C	5+10°C	10+20°C	20+30°C	30+35°C	>35°C
Working time, in minutes ( $t_{gel}$ )	90	45	25	15	6	4	2
Curing time, in minutes ( $t_{cure}$ )	6 h	3 h	2 h	80	45	25	20

## Installation

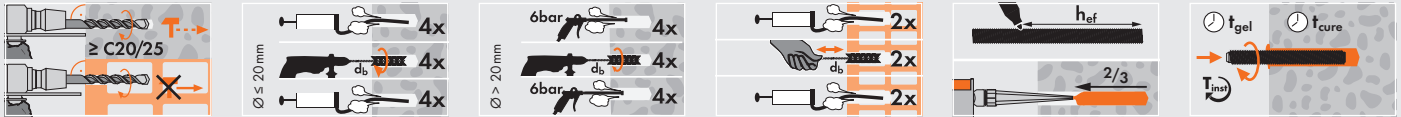

Article code	Description	Languages	Content	Box content	Quantity per pallet
1710050	Cartridge incl. 2 mixers	DE/GB/FR/IT/PL	300	12	1152
17100500	Cartridge incl. 2 mixers	RU/CZ/SK/GB/HR/SLO/HU/BG/RO	300	12	1152

Application with silicone gun

Article code	Description	Languages	Content	Box content	Quantity per pallet
1710057	Cartridge incl. 2 mixers	DE/GB/FR/IT/PL	350	12	1152

## MIT-SP Polyester mortar, styrene free, 300 ml cartridge



## MIT-SP Polyester mortar, styrene free, 350 ml cartridge



## MIT-SP Polyester mortar, styrene free, 400 ml cartridge

Article code	Description	Languages	Content	Box content	Quantity per pallet
1710052	Cartridge incl. 2 mixers	DE/GB/FR/IT/PL	400	12	840
17100520	Cartridge incl. 2 mixers	RU/CZ/SK/GB/HR/SLO/HU/BG/RO	400	12	840

