

# MB-SK Nylon Frame Plug with head hole





## Features

- With head hole MN5 (screwtype wood/chipboard) or M5 (screwtype metric)
- Suitable for light duty insulation applications
- Plug made from high-quality polyamide PA6
- Universal use
- Through fixing



## Applications

thermal insulation on façades, lamps, roller blinds, rails, wardrobes, letter boxes

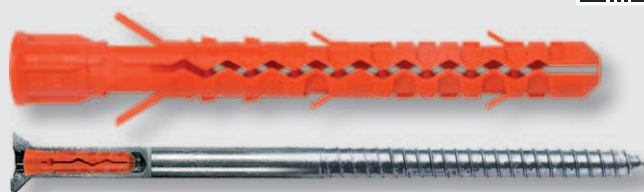


## Technical Data

	Perforated Brick tension load (kN)	Lightweight Concrete tension load (kN)	Aerated Concrete tension load (kN)
MB-SK 10	0.8	0.25	0.3

Important: without hammer drilling in perforated brick and lightweight concrete / Safety factor of 5 is included / 1 kN ≈ 100 kg


## Installation



Article code	Plug and drill $\varnothing$ mm	Length mm	Usable length mm	Drive	Box content		Outer carton	Quantity per pallet
					FS	SK		
1121808	10	80	10	T40	100	600	14400	
1121810	10	100	30	T40	50	300	7200	
1121812	10	120	50	T40	50	300	7200	
1121814	10	140	70	T40	50	300	7200	
1121816	10	160	90	T40	50	300	7200	
1121820	10	200	130	T40	50	300	7200	
<sup>17)</sup> 1121824	10	240	170	T40	25	-	-	
<sup>17)</sup> 1121828	10	280	210	T40	25	-	-	
<sup>17)</sup> 1121830	10	300	230	T40	25	-	-	

<sup>17)</sup> Pre-assembled

## MB-SK Nylon Frame Plug incl. screw with head hole/MN5/T40

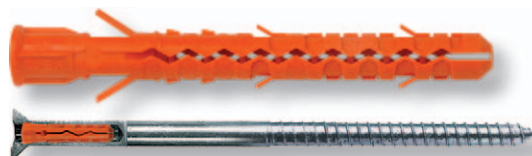

Article code	Screw $\varnothing$ mm	Screw length mm	Drive	Thread		Box content		Outer carton	Quantity per pallet
				d	L <sub>c</sub>	FS	SK		
62916260	7	105	T40	M5	18	100	600	14400	
62916300	7	125	T40	M5	18	100	300	7200	
62916340	7	145	T40	M5	18	100	300	7200	
62916380	7	165	T40	M5	18	100	300	7200	
62916460	7	205	T40	M5	18	100	300	7200	

## SR-SK Safety Screw with internal thread M5/T40

