

MBR-SK Nylon Frame Plug with head hole





Features

- With head hole MN5 (screwtype wood/chipboard) or M5 (screwtype metric)
- Suitable for light duty insulation applications
- Plug made from high-quality polyamide PA6
- Universal use
- Through fixing



Applications

thermal insulation on façades, lamps, roller blinds, rails, wardrobes, letter boxes

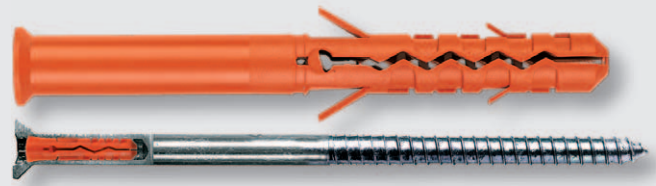


Technical Data

	Concrete C20/25 tension load (kN)	Sandstone tension load (kN)	Brick tension load (kN)
MBR-SK 10	0.8	0.6	0.6

Safety factor of 5 is included / 1 kN ≈ 100 kg


Installation



Article code	Plug and drill \varnothing mm $d_{nom} = d_d$	Length mm L	Usable length mm f_{fix}	Drive	Box content	Outer carton	Quantity per pallet
1121208	10	80	30	T40	100 ⁵¹	600 ³²	14400
1121210	10	100	50	T40	50 ⁵¹	300 ³²	7200
1121220	10	120	70	T40	50 ⁵¹	300 ³²	7200
1121240	10	140	90	T40	50 ⁵¹	300 ³²	7200
1121260	10	160	110	T40	50 ⁵¹	300 ³²	7200
¹⁷⁾ 1121290	10	200	150	T40	50 ⁵¹	300 ³²	7200
¹⁷⁾ 1121294	10	240	190	T40	25	-	-

¹⁷⁾ Pre-assembled

MBR-SK Nylon Frame Plug incl. screw with head hole/MN5/T40

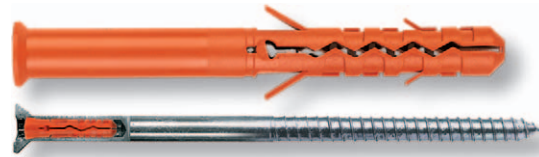

Article code	Screw \varnothing mm d_s	Screw length mm L_s	Drive	Thread	Thread length mm L_G	Box content	Outer carton	Quantity per pallet
62916260	7	105	T40	M5	18	100 ³¹	600 ²²	14400
62916300	7	125	T40	M5	18	100 ⁴¹	300 ¹²	7200
62916340	7	145	T40	M5	18	100 ⁴¹	300 ¹²	7200
62916380	7	165	T40	M5	18	100 ⁴¹	300 ¹²	7200
62916460	7	205	T40	M5	18	100 ⁵¹	300 ²²	7200

SR-SK Safety Screw with internal thread M5/T40

