


# MIT-COOL Low temperature mortar, styrene free




## Features

- European Technical Approval Option 7 for non-cracked concrete with anchor rod and with rebar used as anchor (-10 °C to +20 °C)
- VOC free according to Swiss legislation and certified A+ according to DEVL 1101903D / DEVL 1104875A
- Can be used when ground temperature falls to -26 °C
- Application also in damp and water-filled drill holes
- Variable setting depth
- Stress-free fastening
- Low odour
- Colour of mortar: dark grey
- Indoor (zinc plated) and outdoor (stainless steel) applications

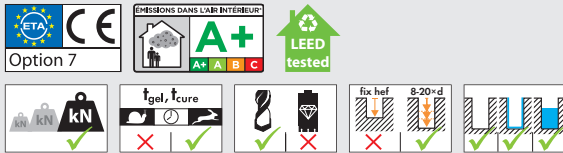

## Applications


steel constructions, wooden constructions, façades, railings



## Temperatures

	-10÷5°C	-5÷0°C	0÷5°C	5÷20°C	+20°C
Working time, in minutes (t <sub>gel</sub> )	50	15	10	5	100 sec
Curing time, in minutes (t <sub>cure</sub> )	12 h	100	75	50	20

## Installation



Article code	Description	Languages	Content	Box content	Quantity per pallet
1710002	Cartridge incl. 2 mixers	DE/GB/FR/IT/PL	300	12	720
17100020	Cartridge incl. 2 mixers	RU/CZ/SK/GB/HR/SLO/HU/BG/RO	300	12	720

Application with silicone gun

Article code	Description	Languages	Content	Box content	Quantity per pallet
1710004	Cartridge incl. 2 mixers	DE/GB/FR/IT/PL	400	12	600
17100040	Cartridge incl. 2 mixers	RU/CZ/SK/GB/HR/SLO/HU/BG/RO	400	12	600

## MIT-COOL Low temperature mortar to -26 °C, 300 ml cartridge



## MIT-COOL Low temperature mortar to -26 °C, 400 ml cartridge

